


Used to connect hooks to chain or other lifting components, this Grade 100 connecting link is an essential part of any secure rigging setup. Its high-strength alloy steel construction ensures reliable performance in heavy-duty applications, making it a trusted choice for safe and efficient lifting.

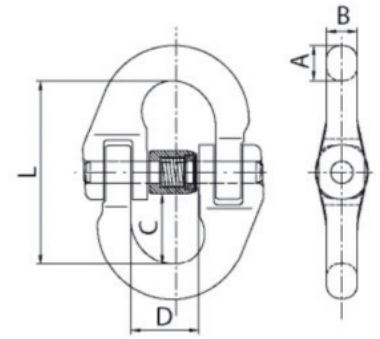

Chain Length (in)	WLL (lbs)	A (in)	B (in)	C (in)	D (in)	L (in)	Weight (lbs)
9/32	5,700	0.39	0.34	0.91	0.73	2.3	0.33
3/8	8,800	0.52	0.45	1.04	1.00	2.72	0.71
1/2	15,000	0.67	0.62	1.42	1.18	3.54	1.68
5/8	22,600	0.75	0.75	1.50	1.43	3.94	2.73
3/4	35,300	0.93	0.87	1.77	1.67	4.76	4.21
7/8	42,700	1.11	0.94	2.38	1.94	6.06	7.82
1	59,700	1.22	1.20	2.56	2.18	6.54	10.8
1-1/4	90,400	1.54	1.42	3.15	2.75	8.07	20.28