


For applications requiring verified load capacities, Tidal Marine offers load-rated shackles that meet strict industry standards.

Our shackles provide reliable performance in high-stress environments, ensuring safety and reliable performance under high-stress conditions.

This bolt-type anchor shackle is ideal for long-term, heavy-duty lifting applications, offering a secure pinning system to prevent unintended load release.

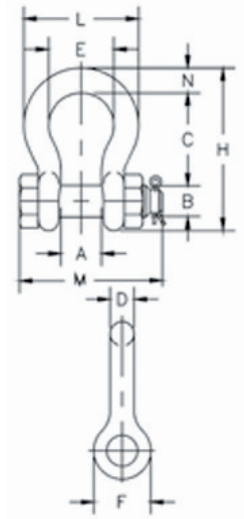

Nominal Size (in)	Working Load Limit (t)	Weight Each (lb)	Dimensions (in)										Tolerance (+/-)	
			A	B	C	D	E	F	H	L	M	N	C	A
3/16	0.33 ‡	0.06	0.38	0.25	0.88	0.19	0.60	0.56	1.47	0.98	1.29	0.19	0.06	0.06
1/4	0.50	0.11	0.47	0.31	1.13	0.25	0.78	0.61	1.84	1.28	1.56	0.25	0.06	0.06
5/16	0.75	0.22	0.53	0.38	1.22	0.31	0.84	0.75	2.09	1.47	1.82	0.31	0.06	0.06
3/8	1.00	0.33	0.66	0.44	1.44	0.38	1.03	0.91	2.49	1.78	2.17	0.38	0.13	0.06
7/16	1.50	0.49	0.75	0.50	1.69	0.44	1.16	1.06	2.91	2.03	2.51	0.44	0.13	0.06
1/2	2.00	0.79	0.81	0.64	1.88	0.50	1.31	1.19	3.28	2.31	2.80	0.50	0.13	0.06
5/8	3.25	1.68	1.06	0.77	2.38	0.63	1.69	1.50	4.19	2.94	3.56	0.69	0.13	0.06
3/4	4.75	2.72	1.25	0.89	2.81	0.75	2.00	1.81	4.97	3.50	4.15	0.81	0.25	0.06
7/8	6.50	3.95	1.44	1.02	3.31	0.88	2.28	2.09	5.83	4.03	4.82	0.97	0.25	0.06
1	8.50	5.66	1.69	1.15	3.75	1.00	2.69	2.38	6.56	4.69	5.39	1.06	0.25	0.06
1-1/8	9.50	8.27	1.81	1.25	4.25	1.13	2.91	2.69	7.47	5.16	5.90	1.25	0.25	0.06
1-1/4	12.00	11.71	2.03	1.40	4.69	1.29	3.25	3.00	8.25	5.75	6.69	1.38	0.25	0.06
1-3/8	13.50	15.83	2.25	1.53	5.25	1.42	3.63	3.31	9.16	6.38	7.21	1.50	0.25	0.13
1-1/2	17.00	19.00	2.38	1.66	5.75	1.53	3.88	3.63	10.00	6.88	7.73	1.62	0.25	0.13
1-3/4	25.00	33.91	2.88	2.04	7.00	1.84	5.00	4.19	12.34	8.80	9.68	2.25	0.25	0.13
2	35.00	52.25	3.25	2.30	7.75	2.08	5.75	4.81	13.68	10.15	10.81	2.40	0.25	0.13
2-1/2	55.00	98.25	4.13	2.80	10.50	2.71	7.25	5.69	17.90	12.75	13.58	3.13	0.25	0.25
3	† 85.00	154.00	5.00	3.30	13.00	3.12	7.88	6.50	21.50	14.62	15.13	3.62	0.25	0.25
3-1/2	† 120.00 ‡	265.00	5.25	3.76	14.63	3.62	9.00	8.00	24.88	17.02	17.00	4.38	0.25	0.25
4	† 150.00 ‡	338.00	5.50	4.26	14.50	4.00	10.00	9.00	25.68	18.00	17.75	4.56	0.25	0.25