


Ø 508  
Load Plate  
Fastened With 5 Bolts  
Both Ends


Ø 1344

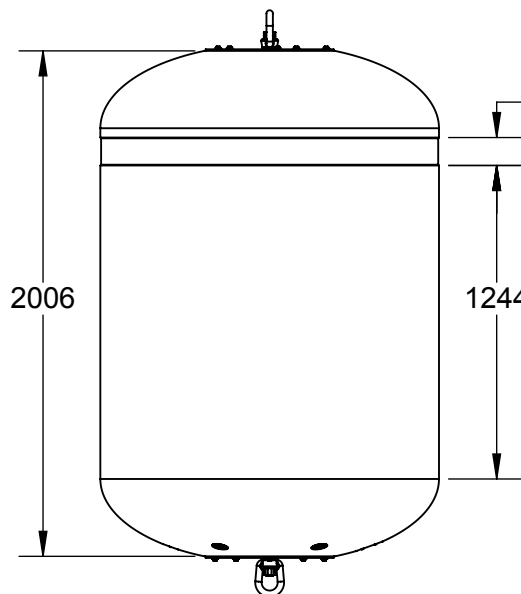

111

1244



Locking Nut  
Welded In Place  
Both Ends



DETAIL A  
SCALE 1 : 15

#8 Swivel  
Eye Nut  
Both Ends

Welded Sleeve  
for Increased Wear  
Resistance

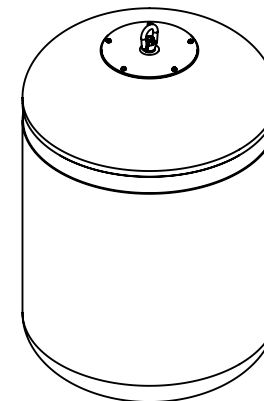

6

Ø 32 Threaded Rod

#### Notes:

1. Total Displacement Approximately 2500 L
2. EPS Foam Filled

#### PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF  
NORTHWEST PLASTICS LTD. ANY REPRODUCTION IN PART OR AS A WHOLE  
WITHOUT THE WRITTEN PERMISSION OF NORTHWEST PLASTICS LTD IS PROHIBITED.

**TIDAL**

DO NOT SCALE DRAWING

DRAWN BY

TK

DATE

08/22/16

DIMENSIONS ARE IN  
MILLIMETERS

TOLERANCES:  
+/- 1.5%

CB 2500 STANDARD ASSEMBLY

SIZE  
**A**

DWG. NO.

TK-022-001

SCALE:1:30

SHEET 1 OF 1